

TALEXdriver LC 25/30/35/40W 600/700/800/900mA fixC C ADV
ADVANCED series

Product description

- Fixed output built-in LED Driver
- Constant current LED Driver
- Output current 600, 700, 800 or 900 mA
- Max. output power 26.5, 31, 36 or 40.5 W
- Nominal life-time up to 50,000 h
- For luminaires of protection class I and protection class II
- Temperature protection as per EN 61347-2-13 C5e
- 5-year guarantee

Properties

- Casing: polycarbonat, white
- Type of protection IP20

Functions

- Overtemperature protection
- Overload protection
- Short-circuit protection
- No-load protection



Standards, page 3

Wiring diagrams and installation examples, page 4


IP20 SELV         RoHS

TALEXdriver LC 25/30/35/40W 600/700/800/900mA fixC C ADV

ADVANCED series

Technical data

Rated supply voltage	220 – 240 V
Input voltage, AC	198 – 264 V
Mains frequency	50 / 60 Hz
Overvoltage protection	320 V AC, 1 h
THD (at 230 V, 50 Hz, full load)	< 20 %
Output current tolerance	± 7.5 %
Output current ripple	± 10 %
Max. output voltage (no-load voltage)	60 V
Turn on time (at 230 V, 50 Hz, full load)	≤ 0.5 s
Turn off time (at 230 V, 50 Hz, full load)	≤ 0.2 s
Hold on time at power failure (output)	0 s
Ambient temperature t_a	-20 ... +50 °C
Ambient temperature t_a (at life-time 50,000 h)	40 °C
Storage temperature t_s	-40 ... +80 °C
Dimensions L x W x H	105 x 70 x 28.3 mm

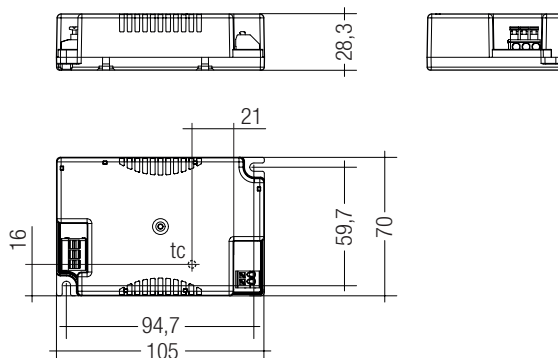

Ordering data

Type	Article number	Packaging, carton	Packaging, low volume	Packaging, high volume	Weight per pc.
LC 25W 600mA fixC C ADV	87500345	15 pc(s).	300 pc(s).	2,700 pc(s).	0.142 kg
LC 30W 700mA fixC C ADV	87500346	15 pc(s).	300 pc(s).	2,700 pc(s).	0.144 kg
LC 35W 800mA fixC C ADV	87500347	15 pc(s).	300 pc(s).	2,700 pc(s).	0.146 kg
LC 40W 900mA fixC C ADV	87500348	15 pc(s).	300 pc(s).	2,700 pc(s).	0.148 kg

Specific technical data

Type	Output current	Input current (at 230 V, 50 Hz, full load)	Input power (at 230 V, 50 Hz, full load)	Output power range	Power factor at full load ^①	Efficiency at full load ^②	Power factor at min. load ^③	Efficiency at min. load ^③	Min. output voltage	Max. output voltage	Max. output peak current at full load ^②	Max. output peak current at min. load ^②	Max. casing temperature t_c
LC 25W 600mA fixC C ADV	600 mA	0.133 A	30.0 W	13.0 – 26.5 W	0.95	88 %	0.9C	81 %	21.4 V	44 V	774 mA	900 mA	65 °C
LC 30W 700mA fixC C ADV	700 mA	0.153 A	34.3 W	15.0 – 31.0 W	0.95	88 %	0.9C	82 %	21.4 V	44 V	903 mA	1,000 mA	65 °C
LC 35W 800mA fixC C ADV	800 mA	0.181 A	40.0 W	20.0 – 36.0 W	0.95	89 %	0.9C	83 %	25.0 V	45 V	1,032 mA	1,100 mA	70 °C
LC 40W 900mA fixC C ADV	900 mA	0.210 A	45.3 W	22.5 – 40.5 W	0.95	89 %	0.9C	83 %	25.0 V	45 V	1,161 mA	1,200 mA	70 °C

^① Test result at 230 V, 50 Hz.

^② The trend between min. and full load is linear.

Standards

EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547
EN 62384

Overload protection

If the output voltage range is exceeded the LED Driver reduces the LED output current or in burst modus. After elimination of the overload the nominal operation is restored automatically.

Overttemperature protection

The LED Driver will reduces the LED output current or in burst working.

Short-circuit behaviour

In case of a short circuit on the secondary side (LED) the LED Driver switched off. After elimination of the short-circuit fault the LED Driver will recover automatically.

No-load operation

The LED Driver works in burst working mode to limit output voltage which allows the application to be able to work safely when LED string opens due to a failure.

Output over voltage protection

The LED Driver will work in burst protection mode to limit output voltage even in single fault condition.

Glow-wire test

according to EN 61347-1 with increased temperature of 960 °C passed.

Mounting of device

Max. torque for fixing: 0.5 Nm/M4

Storage conditions

Humidity: 5 % up to max. 85 %,
not condensed
(max. 56 days/year at 85 %)

Storage temperature: -40 °C up to max. +80 °C

The devices have to be within the specified temperature range (ta) before they can be operated.

Installation instructions

The LED module and all contact points within the wiring must be sufficiently insulated against 1 kV surge voltage.
Air and creepage distance must be maintained.

Replace LED module

1. Mains off
2. Remove LED module
3. Wait for 10 seconds
4. Connect LED module again

Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.

Expected life-time

Type	ta	40 °C	50 °C	60 °C
LC 25/30W 600/700mA fixC C ADV	tc	55 °C	65 °C	x
	Life-time	50,000 h	30,000 h	x
LC 35/40W 800/900mA fixC C ADV	tc	60 °C	70 °C	x
	Life-time	50,000 h	30,000 h	x

The LED Drivers are designed for a life-time stated above under reference conditions and with a failure probability of less than 10 %.


Maximum loading of automatic circuit breakers

Automatic circuit breaker type	C10	C13	C16	C20	B10	B13	B16	B20	Inrush current
Installation Ø	1.5 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	1.5 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	I _{max} Time
LC 25W 600mA fixC C ADV	20	30	40	47	10	15	20	24	20 A 200 µs
LC 30W 700mA fixC C ADV	20	30	40	47	10	15	20	24	20 A 200 µs
LC 35W 800mA fixC C ADV	20	30	40	47	10	15	20	24	25 A 200 µs
LC 40W 900mA fixC C ADV	20	30	40	47	10	15	20	24	25 A 200 µs

Harmonic distortion in the mains supply (at 230V/50 Hz and full load) in %

	THD	3.	5.	7.	9.	11.
LC 25W 600mA fixC C ADV	9	6	3	3	3	3
LC 30W 700mA fixC C ADV	10	8	3	3	3	3
LC 35W 800mA fixC C ADV	8	5	3	3	3	3
LC 40W 900mA fixC C ADV	8	5	3	3	3	3

Wiring diagram

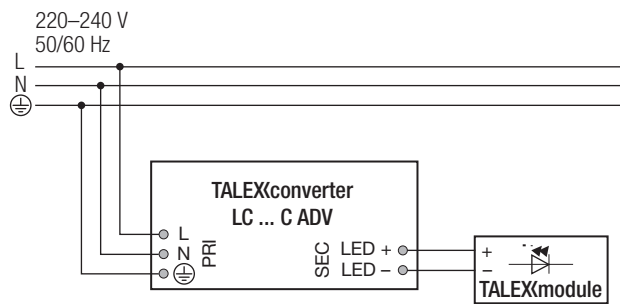

Isolation and electric strength testing of luminaires

Electronic devices can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only!) or ENEC 303-Annex A, each luminaire should be submitted to an isolation test with 500 V_{DC} for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal.
The isolation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1500 V_{AC} (or 1.414 x 1500 V_{DC}). To avoid damage to the electronic devices this test must not be conducted.

Additional information

Additional technical information at
www.tridonic.com → Technical Data

Guarantee conditions at
www.tridonic.com → Services


No warranty if device was opened.

Wiring type and cross section


The input wiring can be stranded wires with ferrules with a cross section of 0.5 – 1.5 mm² or with solid wires with a cross section of 0.5 – 2.5 mm². Strip 9 – 10 mm of insulation from the cables to ensure perfect operation of the push-wire terminals.

The output wiring can be done with a cross section of 0.5 – 1.5 mm². Strip 8.5 – 9.5 mm of insulation from the cables to ensure perfect operation of the push-wire terminals.

Input wiring



Output wiring




Wiring guidelines

- All connections must be kept as short as possible to ensure good EMI behaviour.
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Max. length of output wires is 2 m.
- Secondary switching is not permitted.
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metal parts, metal cable clips, louver, etc.).


Release of the wiring

Press down the “push button” and remove the cable from front.

Input terminal




Output terminal




Diagrams LC 25W 600mA fixC C ADV at 230 V / 50 Hz


Efficiency vs load

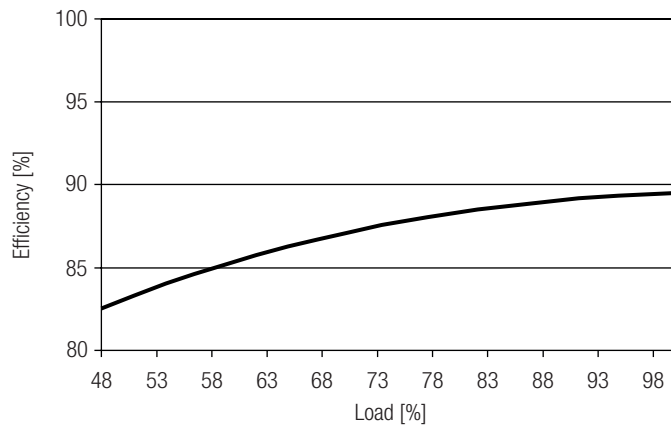


Power factor vs load

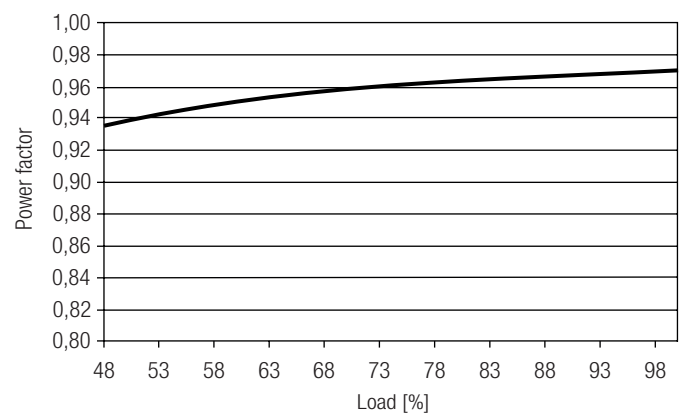


Input power vs load

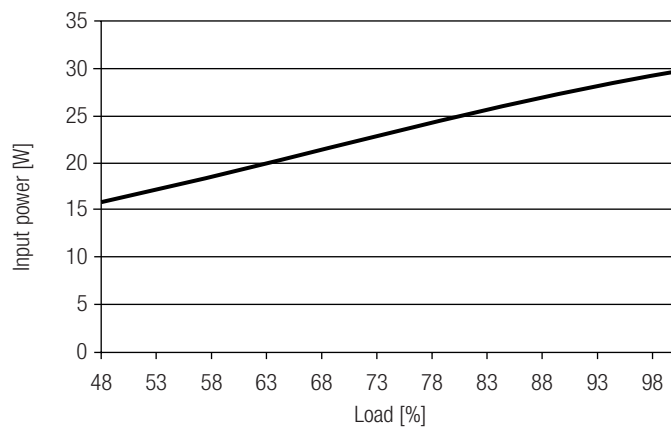

Input current vs load

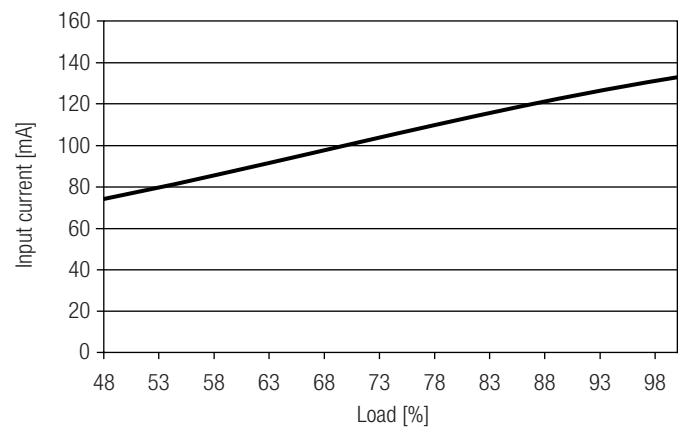


THD vs load

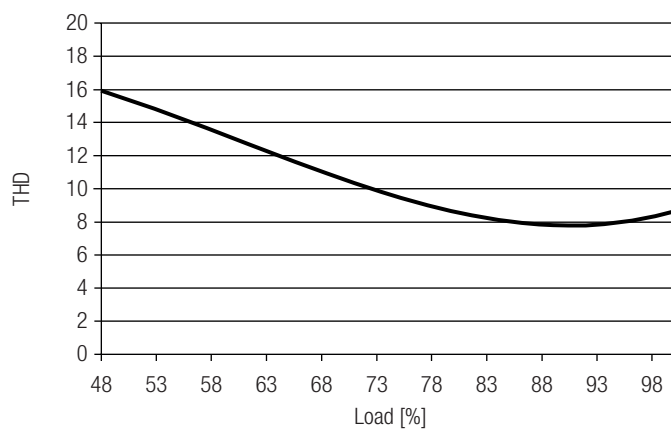


Diagrams LC 30W 700mA fixC C ADV at 230 V / 50 Hz


Efficiency vs load

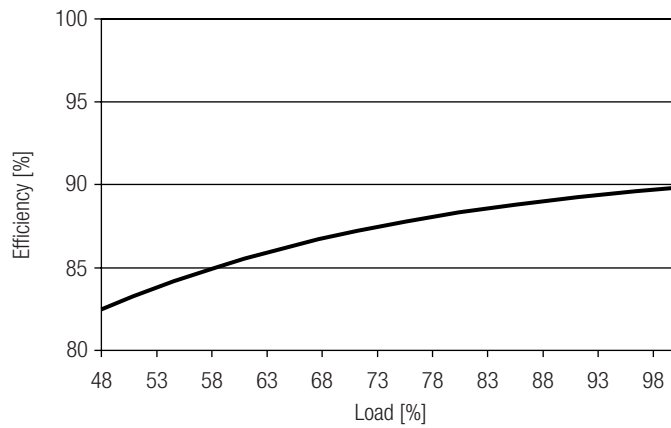


Power factor vs load

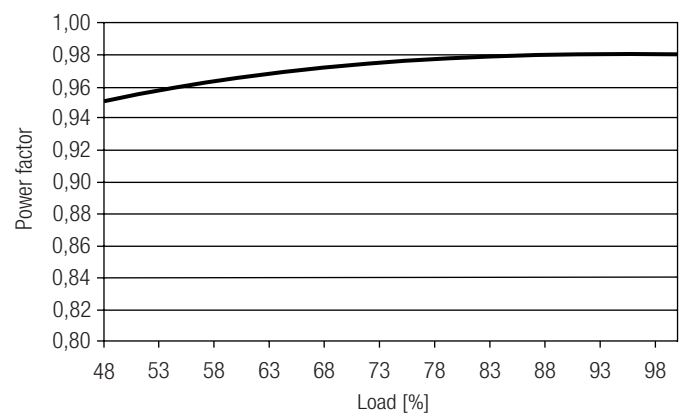


Input power vs load

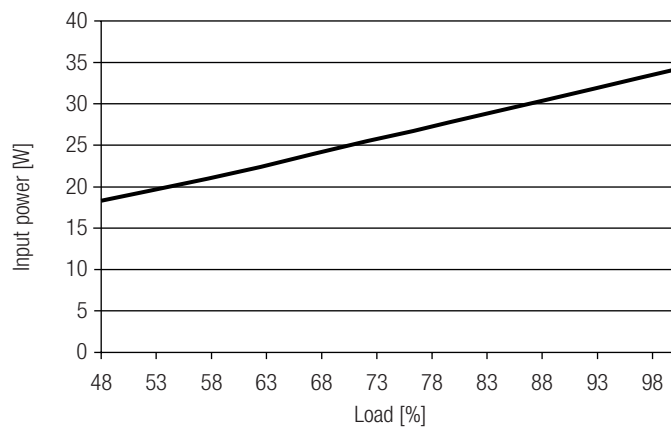

Input current vs load

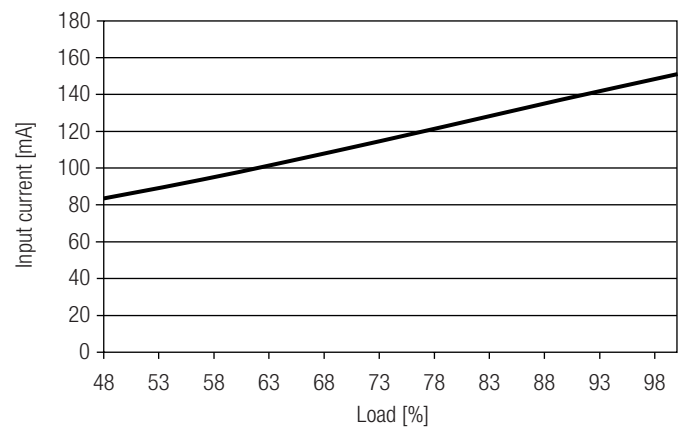


THD vs load

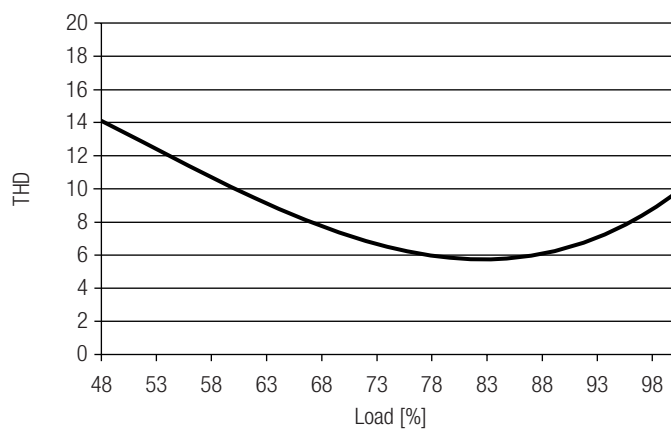


Diagrams LC 35W 800mA fixC C ADV at 230 V / 50 Hz


Efficiency vs load

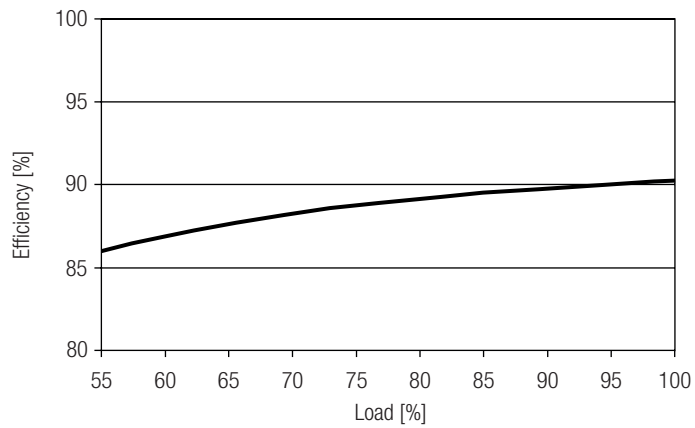


Power factor vs load

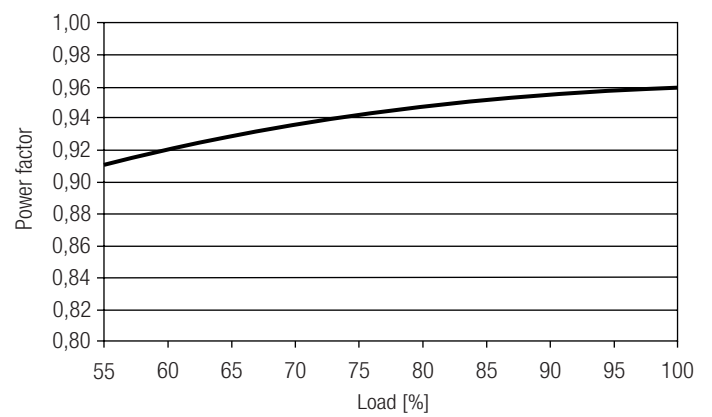


Input power vs load

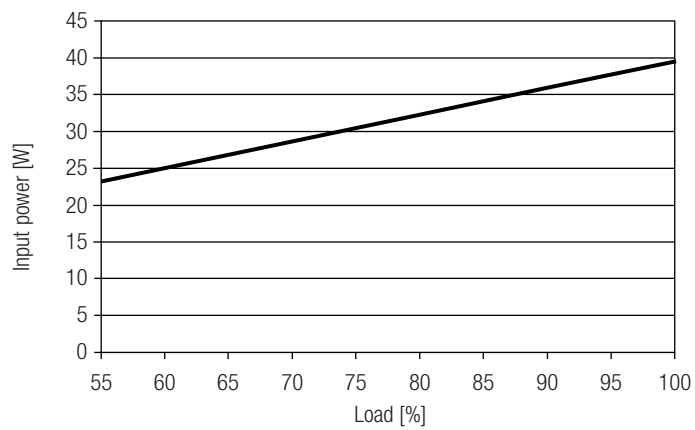

Input current vs load

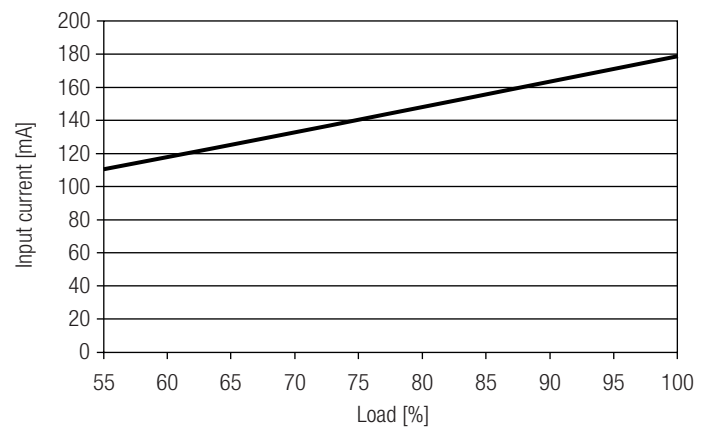


THD vs load

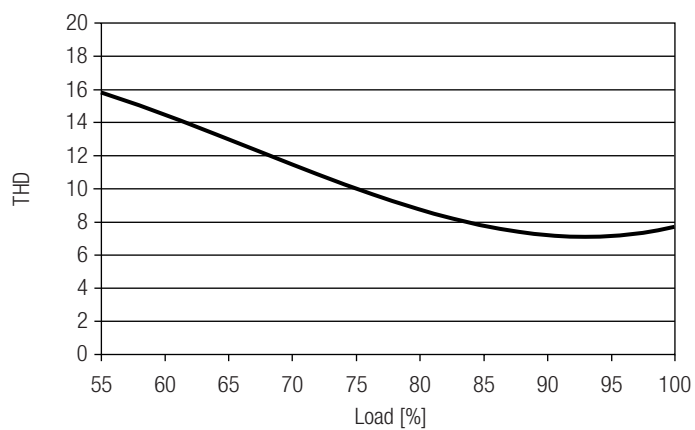


Diagrams LC 40W 900mA fixC C ADV at 230 V / 50 Hz


Efficiency vs load

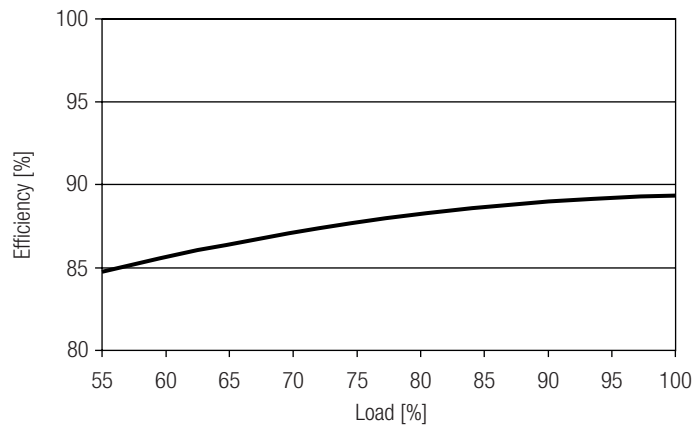


Power factor vs load

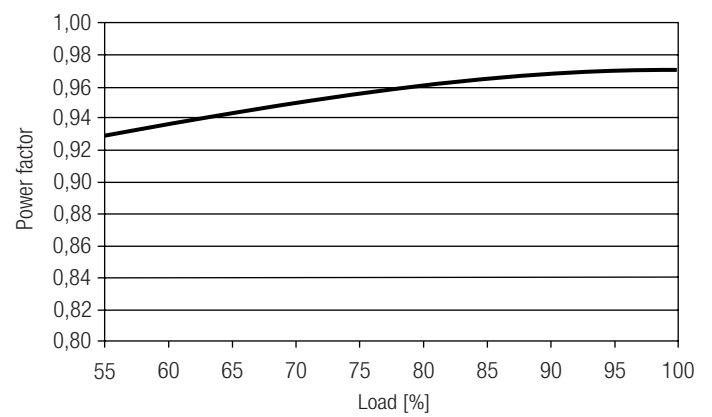

Input power vs load

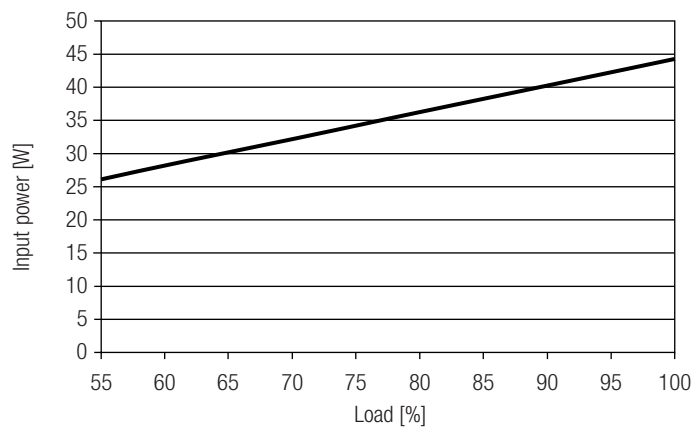

Input current vs load

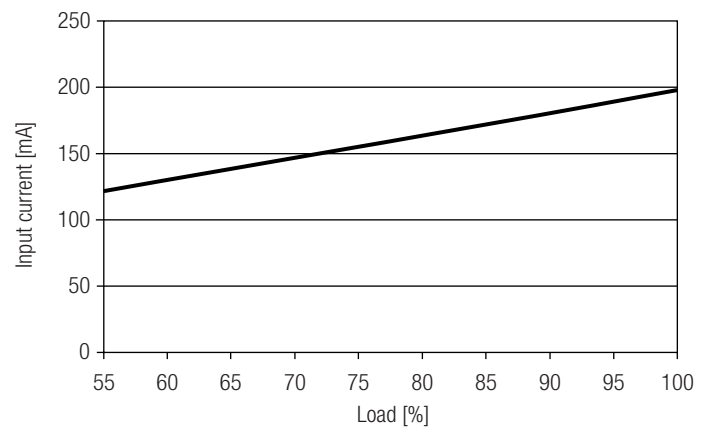

THD vs load

