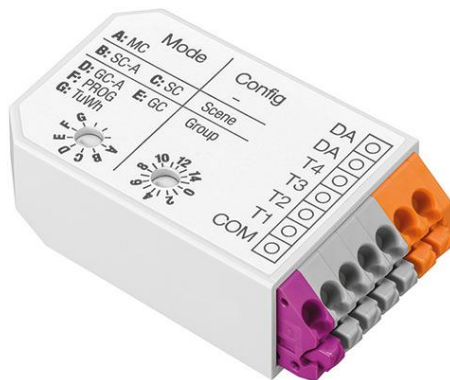


DALI XC

Control module with 4 freely programmable inputs

**Product description**

- DALI input controller
- _ 4 independent inputs for floating contacts
 - _ For connecting standard momentary-action switch or switches
 - _ Adjustable operating mode and range via 2 rotary selector
 - _ Multiple DALI XCs possible on the DALI line
 - _ Power supply via DALI line
 - _ Connection wires according to the terminal colours with 25 cm length included
 - _ 5-year guarantee

Website


<http://www.tridonic.com/28001716>



DALI XC

Control module with 4 freely programmable inputs

The complete data sheet for this product is available in the Downloads section.

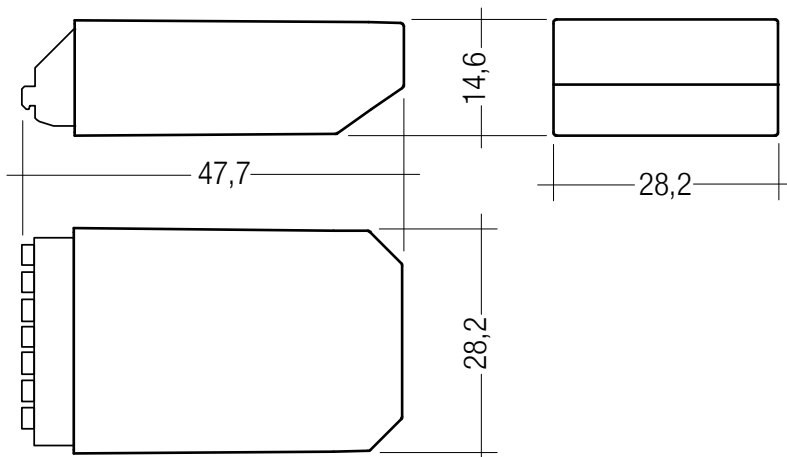**Ordering data**

Type	Article number	Packaging, carton	Weight per pc.
DALI XC	28001716	125 pc(s).	0.035 kg

Technical data

Supply via	DALI cable
Current draw	6 mA
Input	4 momentary-action switches or relais
Output	DALI
Operating temperature	0 ... +60 °C
Storage temperature t_s	-25 ... +80 °C
Turn on time	≤ 6 s
Humidity	20 ... 90 % (non-condensing)
Type of protection	IP20
Mounting	Mounting box 60 x 61 (ø x T)
Housing material	PC, halogen-free polycarbonate, non-flammable
Dimensions L x W x H	47.7 x 28.2 x 14.6 mm

Approval marks**Standards**

IEC CISPR 15, IEC 61547, IEC 61347-2-11, IEC 61347-1