

## AF00, AF10, and AF20 OUTSIDE TEMPERATURE SENSORS

### PRODUCT DATA



### FEATURES

- Pt 1000, NTC 10k, or NTC 20k temperature sensing element
- Wide sensing range
- High accuracy

### Models

OS no.	sensor type	IP rating	comments	sensing range
AF00-B54	Pt 1000	54	--	-40...+70 °C (-40...+158 °F)
AF10-B54	NTC 10k	54	--	
AF20-B54	NTC 20k	54	--	
AF20-B65	NTC 20k	65	--	
AF20-B54-N	NTC 20k	54	no logo	

### GENERAL

The AF0, AF00, AF10, and AF20 Outside Temperature Sensors contain a single sensor element, and are used to detect outside temperature in heating, ventilation, and air conditioning systems enabling weather-related temperature control.

The innovative mounting concept with a mounting bracket (which ensures that the housing is held at the proper distance to the mounting surface for correct measurement) allows for easy installation and unbiased detection of ambient temperature.

The sensors are suitable for use in the following control systems:

- EAGLE
- LION
- TIGER
- PANTHER
- Excel 5000, Excel 500, and Excel 800
- Excel Web and Excel Web II
- Honeywell I/O modules
- LYNX, SERVAL, Excel 10, and Excel 12

or other systems using Pt 100, Pt 1000, NTC 10k, or NTC 20k temperature sensing elements.

### SPECIFICATION

#### Nominal value

Pt 1000	1000 Ω at 0 °C (32 °F)
NTC 10k	10 kΩ at 25 °C (77 °F)
NTC 20k	20 kΩ at 25 °C (77 °F)

#### Accuracy

Pt 1000 (IEC751 Class B)	±0.3 °C at 0 °C (32 °F)
NTC 10k	±0.2 °C at 25 °C (77 °F)
NTC 20k	±0.2 °C at 25 °C (77 °F)

#### Sensitivity

Pt 1000	≈ 3.85 Ω / K
NTC 10k	-440 Ω / K at 25 °C (non-linear)
NTC 20k	≈ -934.5 Ω / K at 25 °C (non-linear)

#### Connection

two-wire (2x0.22 mm<sup>2</sup>)

#### Time constant

≤ 3 min.

#### Enclosure material

polycarbonate, UL94-V0 approved

#### Protection class

IP54 / IP65 as per EN 60529

#### Ambient Limits (wiring box)

Storage temperature	-30...+70 °C (-22...+158 °F)
Humidity	0...95% rh, non-condensing

#### Dimensions

see Fig. 1 on page 2

## DIMENSIONS

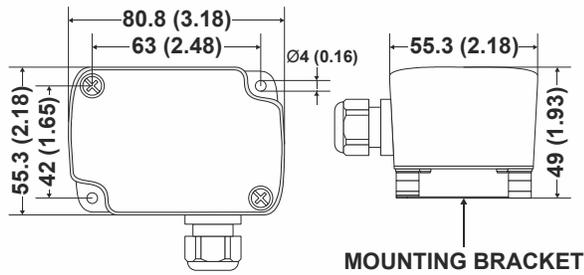


Fig. 1. Dimensions of the outside temperature sensor in mm (inches)

## WIRING

wiring run	max. length
sensor to controller	200 m (660 ft)

Offset due to wire resistance per 10 m of distance from sensor to controller, when using the AF00-B54 (Pt 1000):

type of wire	Pt 1000
0.5 mm <sup>2</sup> (AWG20)	0.18 °C (0.324 °F)
1.0 mm <sup>2</sup> (AWG17)	0.09 °C (0.162 °F)
1.5 mm <sup>2</sup> (AWG15)	0.06 °C (0.108 °F)

**NOTE:** Use shielded wiring in areas with high EMI. Keep 15 cm (5.9") minimum distance between sensor lines and 230 Vac power lines.

**Honeywell**

Manufactured for and on behalf of the Environmental and Combustion Controls Division of Honeywell Technologies Sàrl, Rolle, Z.A. La Pièce 16, Switzerland by its Authorized Representative:

### Automation and Control Solutions

Honeywell GmbH  
 Böblinger Strasse 17  
 71101 Schönaich, Germany  
 Phone +49 (0) 7031 637 01  
 Fax +49 (0) 7031 637 740  
<http://ecc.emea.honeywell.com>